
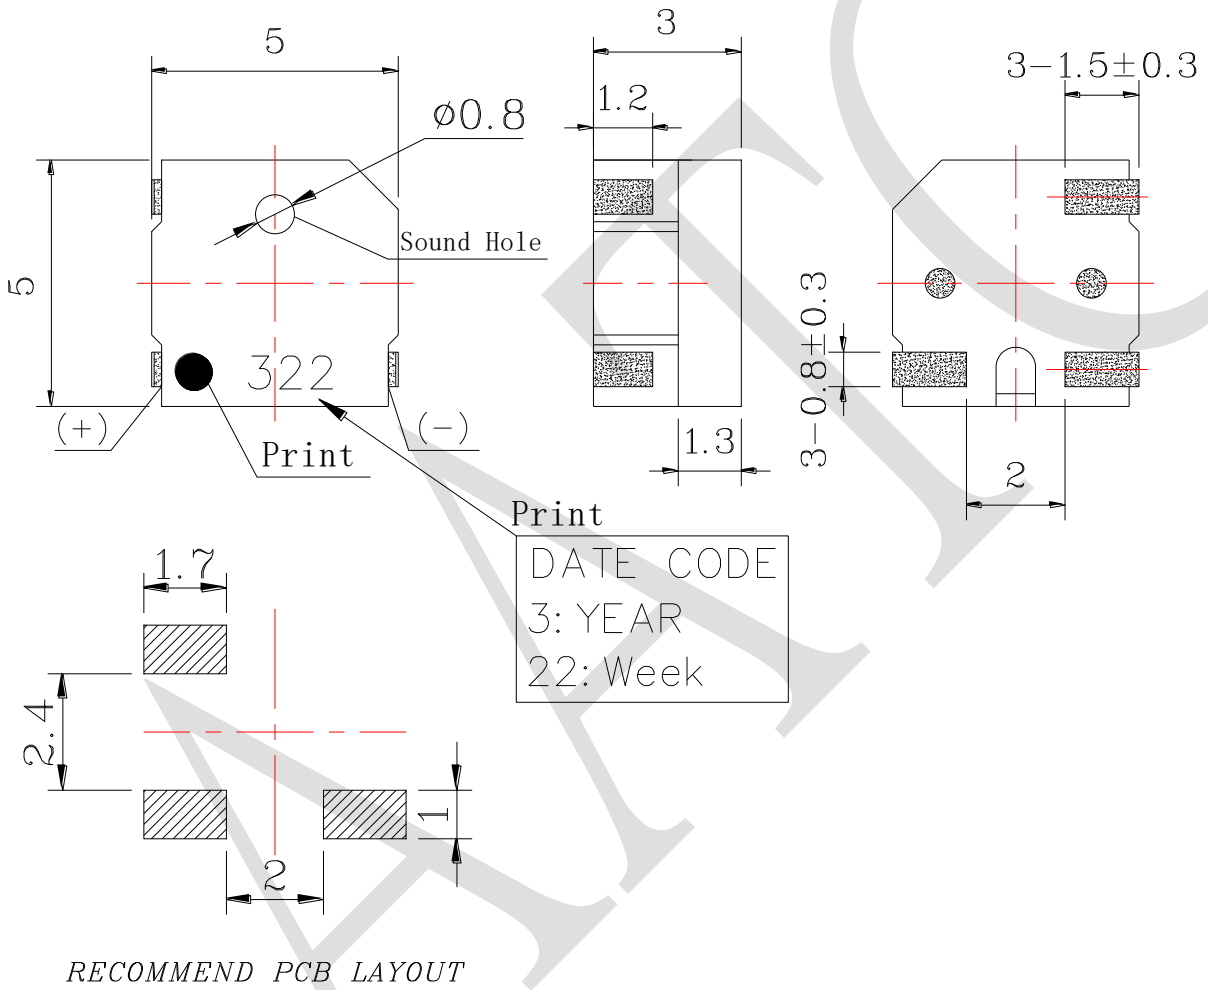


# 1. SPECIFICATION

AD-503

ITEM		UNITS	SPECIFICATIONS		CONDITIONS
01	Rated Voltage	V	3		 <p>Standard state, standard drive circuit. Square wave 1/2 duty.</p>
02	Operating Voltage	V	2 ~ 4		
03	Consumption Current	mA Max.	110		
04	Sound pressure level (Distance at 10cm )	dB(A) Min.	77	2600Hz	Rated voltage, rated frequency.
			80	2900Hz	
05	Direct Current Resistance	$\Omega$	12 $\pm$ 3		
06	Rated Frequency	Hz	2900		

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------



Print  
DATE CODE  
3: YEAR  
22: Week

RoHS

TITLE: SOUND TRANSDUCER (SMD)		DRAWN: Zack	2013/05/27	SCALE: 1:1	SHEET: 1 : 1
PART NO. AD-503		DESIGNED: R & D OF AAT	UNITS: mm		
DWG NO. SMD-050030F-03026		CHECKED:	TOLERANCE $\pm 0.5$		
		APPROVAL:	UNLESS OTHERWISE SPECIFIED:		
REV 6		MATERIAL: LCP	ONE PLACE DECIMAL $\pm$ ***		
			TWO PLACE DECIMAL $\pm$ ***		
			THREE PLACE DECIMAL $\pm$ ***		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC