


# 1. SPECIFICATION

AS-1204A-LF

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	3.5	
02	Operating Voltage	V	2.5 ~ 6.0	
03	Consumption Current	mA (Max)	Mean : 70	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
			Peak : 210	
04	Direct Current Resistance	$\Omega$	$16 \pm 2.4$	
05	Sound pressure level (Distance at 10cm )	dBA (Min)	85	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
06	Rated Frequency	Hz	2048	


REV NO.

REVISION NOTE



APPROVAL

DATE

Sound hole  $\phi 2.4$



Print

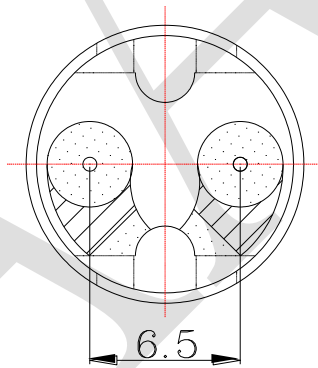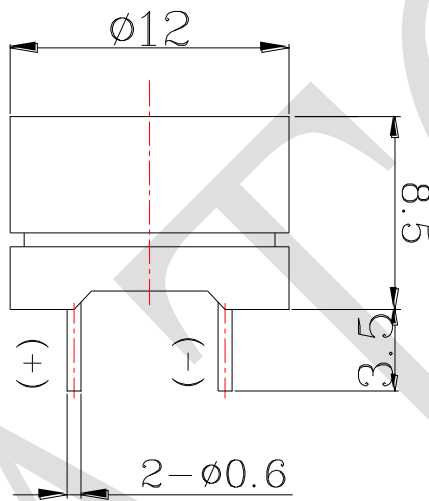

RoHS

TITLE: ELECTRO MAGNETIC BUZZER		DRAWN: Zack	2015/01/21	SCALE: 4:1	SHEET: 1 of 1
PART NO. AS-1204A-LF		DESIGNED: R&D OF AAT		UNITS: mm	
DWG NO. UGC1235G-1P3.5A		CHECKED:		TOLERANCE $\pm 0.5$	
		APPROVAL:		UNLESS OTHERWISE SPECIFIED:	
1	REV	MATERIAL: NORYL		ONE PLACE DECIMAL $\pm$ ***	
				TWO PLACE DECIMAL $\pm$ ***	
				THREE PLACE DECIMAL $\pm$ ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC