
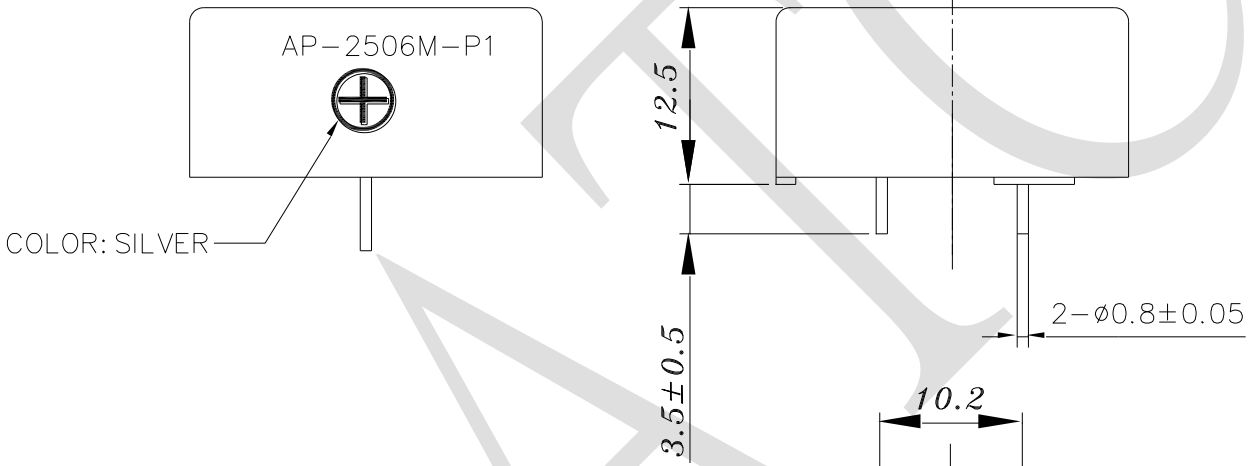


1. SPECIFICATION

AP-2506M-P1 (RoHS)

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	6	Vo-p
02	Operating Voltage	V	3 ~ 8	
03	Consumption Current	mA (Max)	Mean : 70	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
			Peak : 210	
04	Direct Current Resistance	Ω	36±5	
05	Sound Output (Distance at 10cm)	dBA (Min)	85	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
06	Rated Frequency	Hz	820	

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

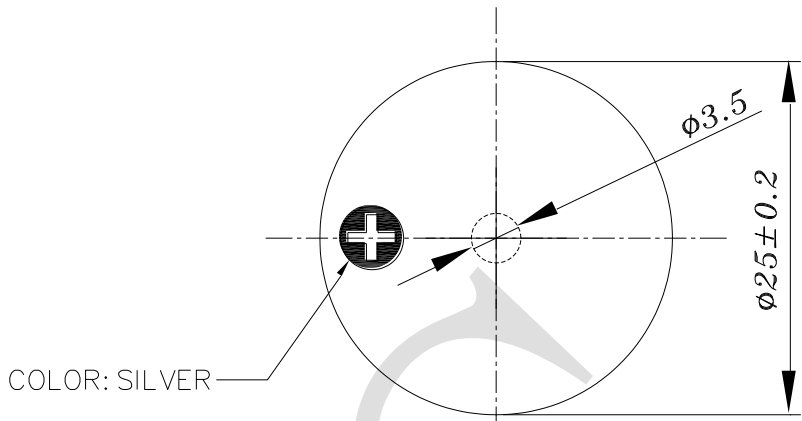

WAVE SOLDER AND WASH NOT ALLOWED

EPOXY POTTING

RoHS

TITLE: ELECTRO MAGNETIC BUZZER		DRAWN: Jason	2011/05/16	SCALE: 4:1	SHEET: 1 of 1
PART NO. AP-2506M-P1		DESIGNED: R&D OF AAT	UNITS: mm		
DWG NO. GS-1000802		CHECKED:	TOLERANCE ± 0.3		
		APPROVAL:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL \pm *** TWO PLACE DECIMAL \pm *** THREE PLACE DECIMAL \pm ***		
REV 4		MATERIAL: PBT			



苙翔科技股份有限公司
ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC