
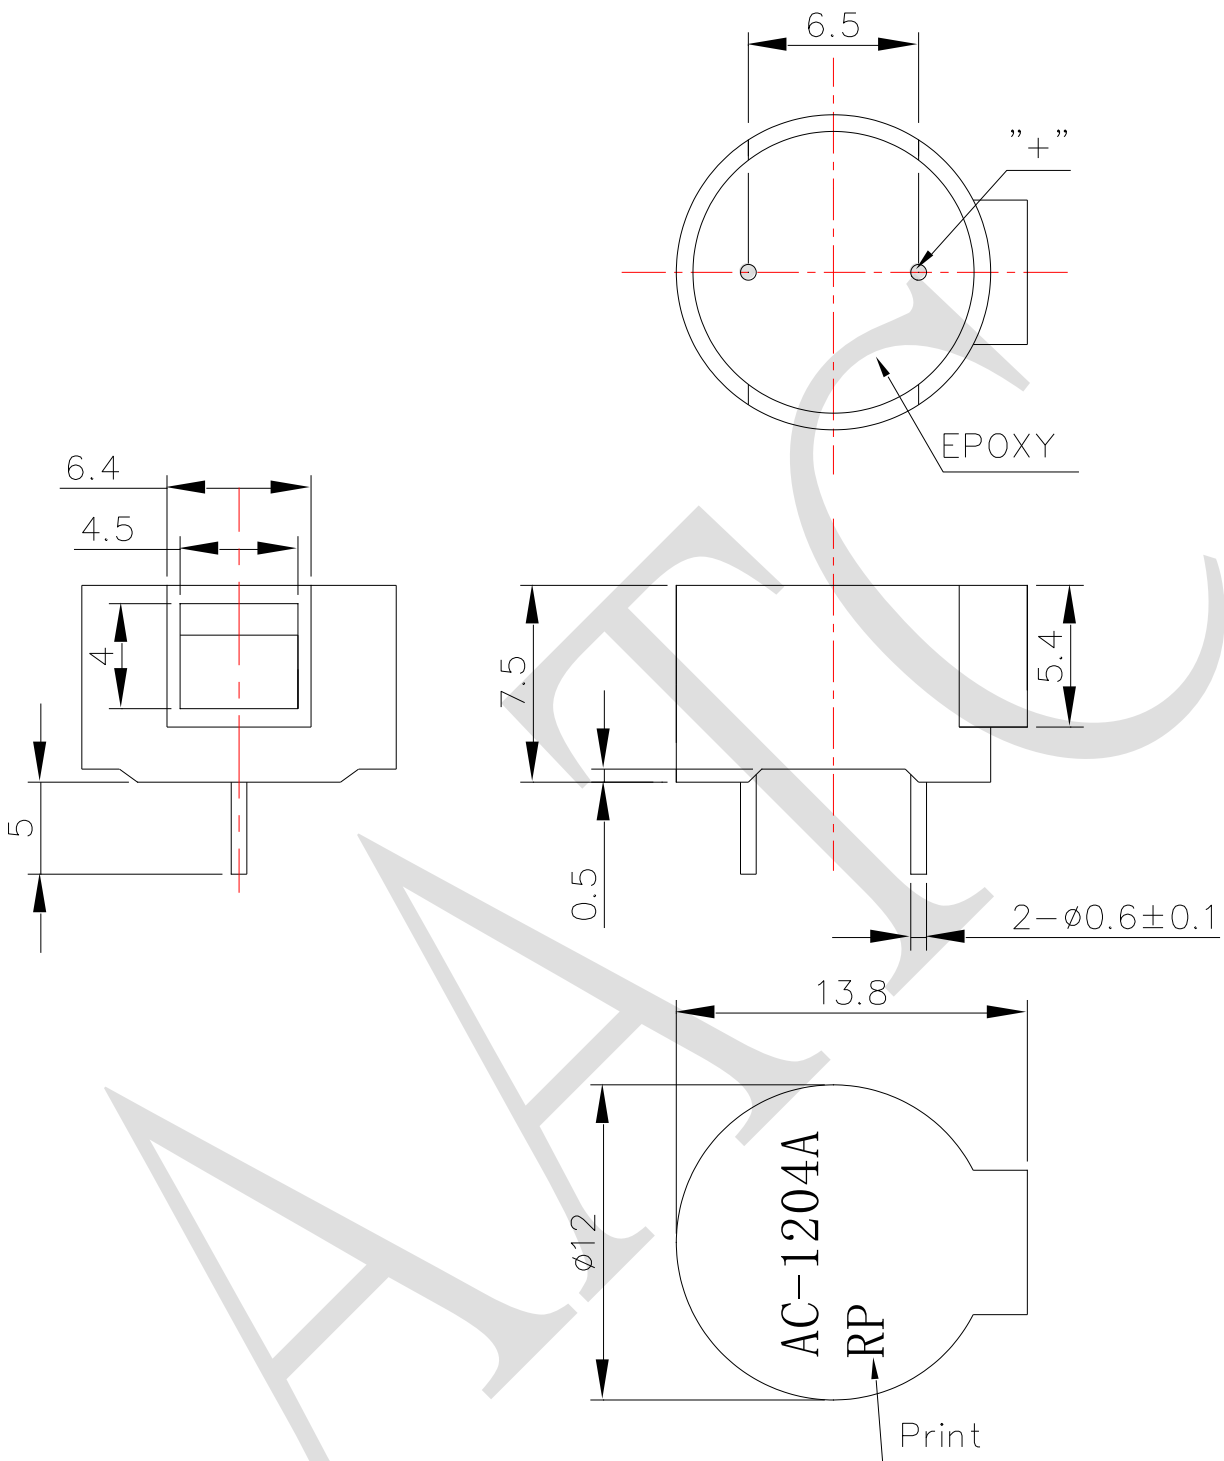


1. SPECIFICATION

AC-1204A-RP

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	3.5	
02	Operating Voltage	V	2 ~ 5	
03	Consumption Current	mA (Max)	Mean : 70	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
			Peak : 210	
04	Direct Current Resistance	Ω	16±3	
05	Sound pressure level (Distance at 10cm)	dBA (Min)	85	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
06	Rated Frequency	Hz	2731	

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------



RoHS

TITLE: ELECTRO MAGNETIC BUZZER		DRAWN: Jerry	2012/08/06	SCALE: 4:1	SHEET: 1 of 1
PART NO. AC-1204A-RP		DESIGNED: R&D OF AAT	UNITS: mm		
DWG NO. UGCM04BPD-3.5VR16		CHECKED:	TOLERANCE ± 0.3		
		APPROVAL:	UNLESS OTHERWISE SPECIFIED:		
REV	2	MATERIAL: NORYL	ONE PLACE DECIMAL ± ***		
			TWO PLACE DECIMAL ± ***		
			THREE PLACE DECIMAL ± ***		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC