


1. SPECIFICATIONS

AMF-O60F25-1FWH3

01	Electret's Type	Foil type
02	Sensitivity	-25±3dB (0dB=1V/Pa,1KHz)
03	Standard Operation Voltage	2.0 V
04	Output Impedance	2.2 KΩ
05	Directivity	Omni directional
06	Frequency Range	20 – 16 K Hz
07	Max. Operation Voltage	10V
08	Current Consumption	Max.0.5mA
09	Sensitivity Reduction	Within -3dB 0dB=1V/Pa,1KHz Vs=2.0to 1.5V
10	S/N Ratio	≥ 60dB
11	Sound Pressure Level	110 dB

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

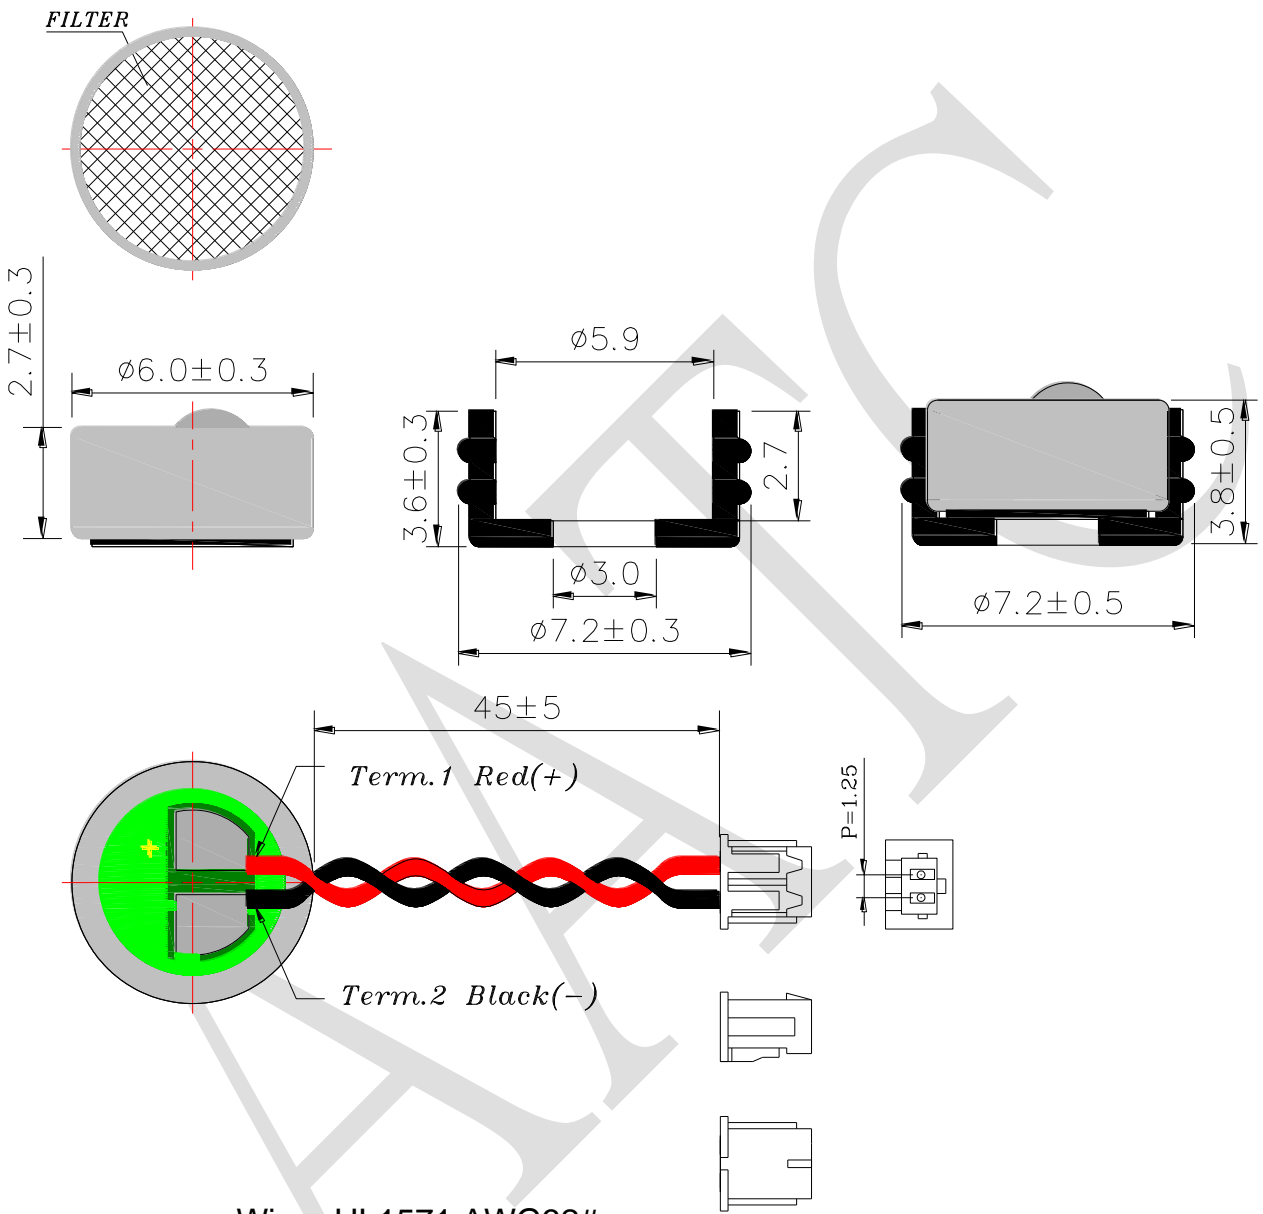

Wire : UL1571,AWG32#
 Holder : DD-EQ-JTC72-05
 Connector : Equivalent to Molex 51021-0200

RoHS

TITLE: MICROPHONE		DRAWN: <i>Zack</i>	2016/12/09	SCALE: 5:1	SHEET: 1 of 1
PART NO. AMF-060F25-1FWH3		DESIGNED: R & D OF AAT	UNITS: mm		
DWG NO. *****		CHECKED:	TOLERANCE ± 0.3		
REV 1		APPROVAL:	UNLESS OTHERWISE SPECIFIED:		
REV		MATERIAL: AL	ONE PLACE DECIMAL ± ***		
			TWO PLACE DECIMAL ± ***		
			THREE PLACE DECIMAL ± ***		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC