


# 1. SPECIFICATION

AC-701X-P


ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	1.0	
02	Operating Voltage	V	1 ~ 3	
03	Consumption Current	mA (Max)	Mean : 30	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
			Peak : 90	
04	Direct Current Resistance	$\Omega$	25±3	
05	Sound pressure level (Distance at 10cm )	dBA (Min)	63	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
06	Rated Frequency	Hz	2730	

REV NO.

REVISION NOTE

APPROVAL

DATE

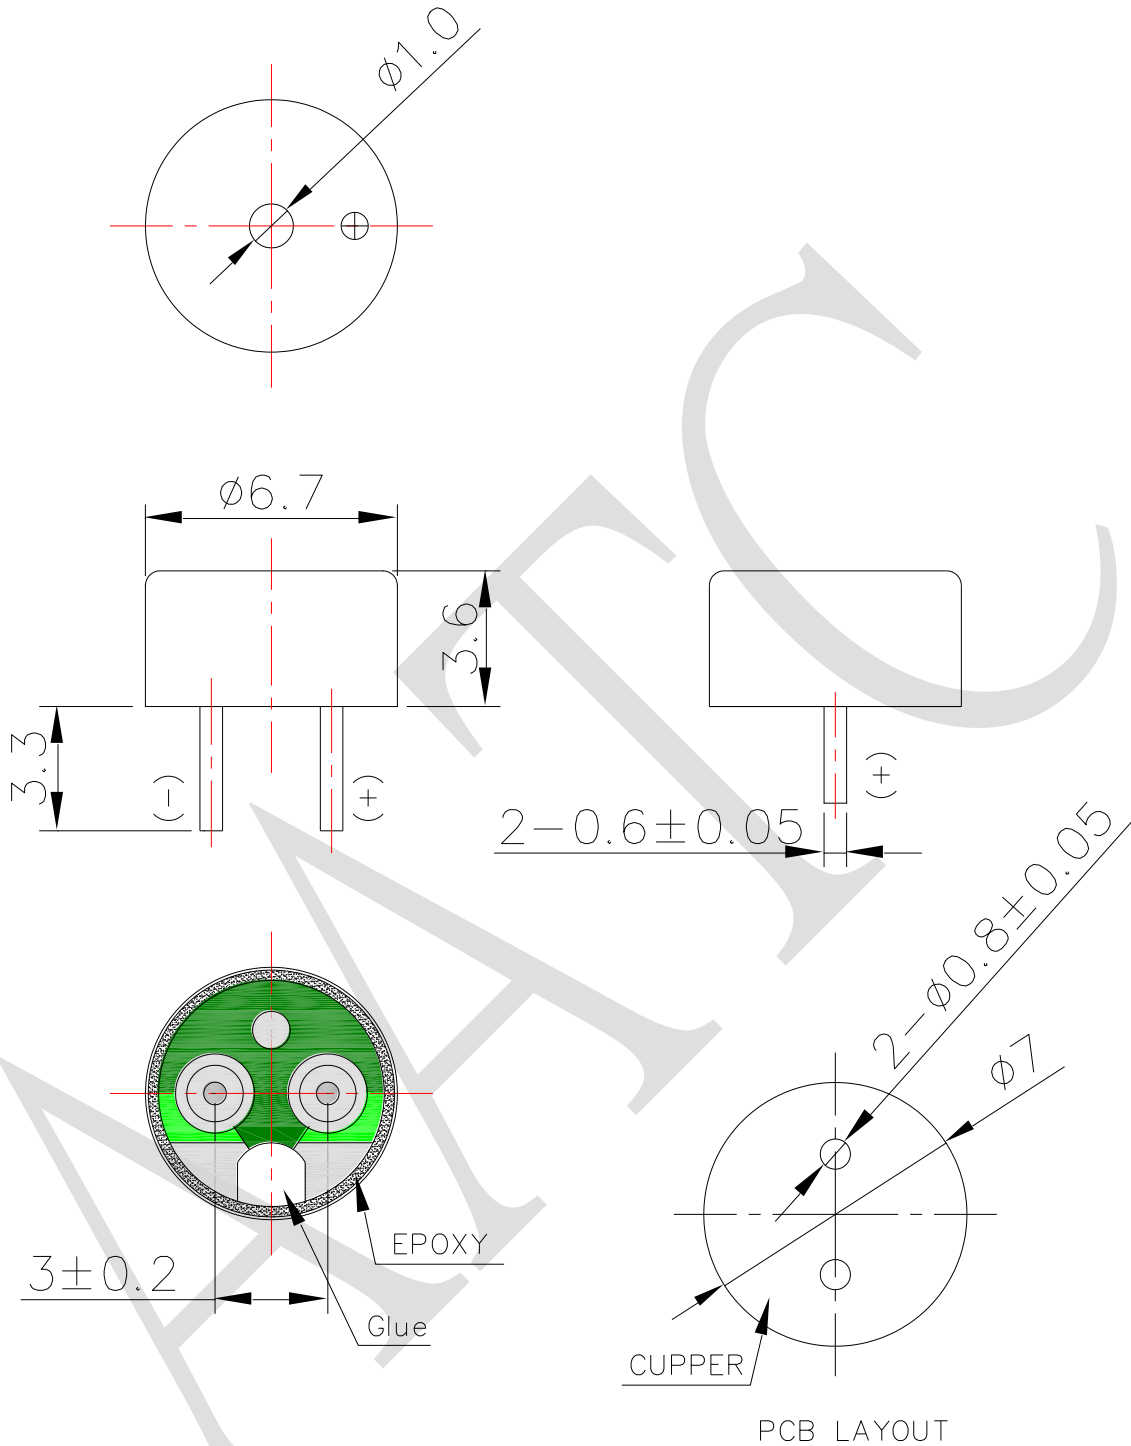

RoHS

TITLE: ELECTRO MAGNETIC BUZZER		DRAWN: Jerry	2013/01/03	SCALE: 4:1	SHEET: 1 of 1
PART NO. AC-701X-P		DESIGNED: R&D OF AAT	UNITS: mm		
DWG NO. UGCM0601AP3.3D-R25	2 REV	CHECKED:	TOLERANCE $\pm 0.5$		
		APPROVAL:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL $\pm$ *** TWO PLACE DECIMAL $\pm$ *** THREE PLACE DECIMAL $\pm$ ***		
		MATERIAL: NORYL			



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC