


1. SPECIFICATION

AR-28300-1C (RoHS)

ITEMS.		SPECIFICATIONS
01	Type	Dynamic 28 mm receiver unit
02	Sensitivity (S.P.L)	91dB \pm 3 dB at 1kHz 60mV with IEC 318 coupler
03	Impedance.	300 Ohm \pm 20% at 1KHz
04	Frequency Range	300 – 4000Hz
05	Nominal Input Power	50 mW
06	Max. Input Power.	100 mW for 1 minute.
07	Total Harmonics Distortion	Max 5 % at 1K Hz.

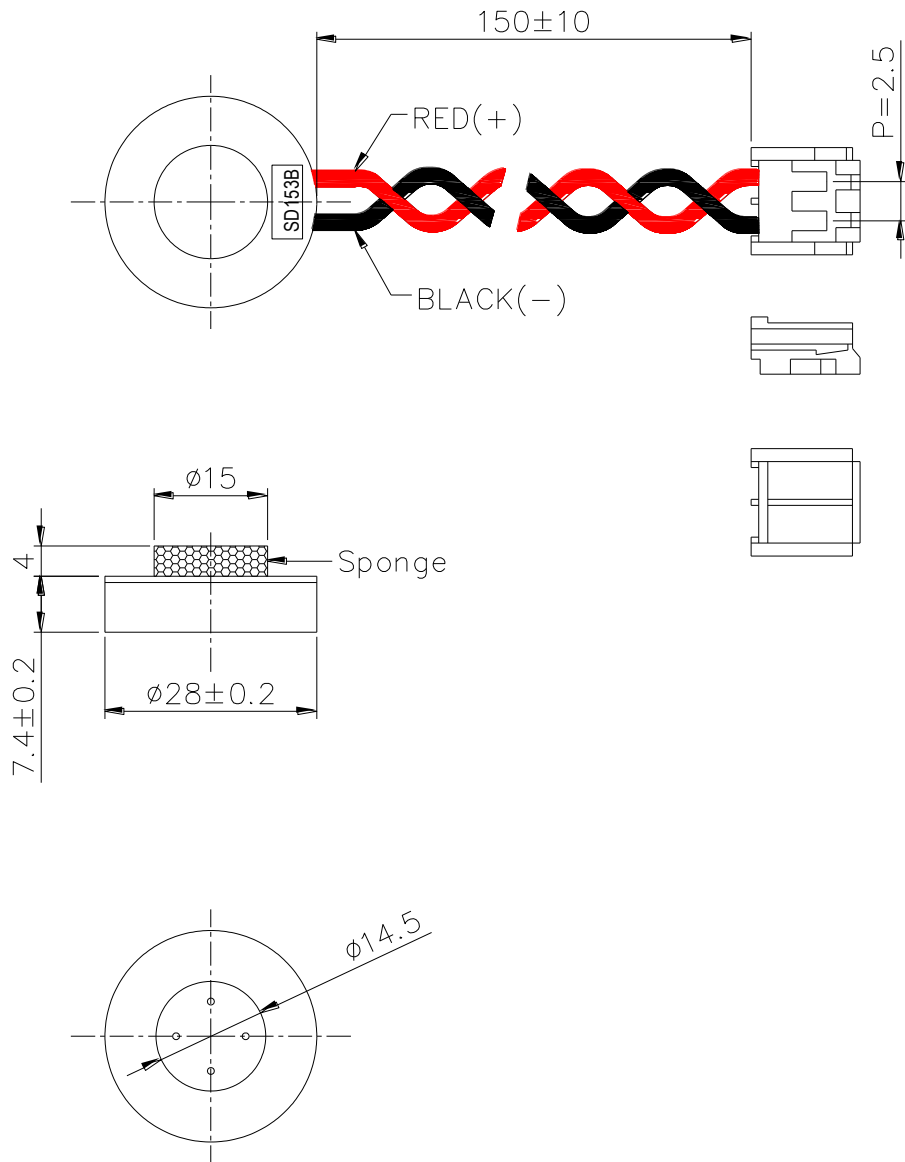

WIRE : UL 1571 , AWG28 .

CONNECTOR:A2502TOP-2.0

DIAPHRAGM:PET

TITLE: TELEPHONE RECEIVER		DRAWN: Lemon 2009-12-24	SCALE: 1:1	SHEET: 1:1
PART NO. AR-28300-1C		DESIGNED: R&D OF AAT	UNITS: mm	
DWG NO. HS-R09122402		CHECKED:	TOLERANCE ± 0.5	
		APPROVAL:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL ± *** TWO PLACE DECIMAL ± *** THREE PLACE DECIMAL ± ***	
REV 1		MATERIAL: ABS		



笠翔科技股份有限公司
ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.