


# 1. SPECIFICATION

ADI-F10H5C

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	5.0	
02	Operating Voltage	V	4.0 ~ 7.0	
03	Consumption Current	mA (Max)	30	Rated Voltage
04	Resonant Frequency	Hz	2700 ± 200	Rated Voltage
05	Response times	ms	≥ 100	
06	Sound pressure level	dB(A) Min.	85	Distance at 10cm Rated Voltage / Resonant Frequency
07	Operating Temp.	°C	-30 ~ +70	
08	Storage Temp.	°C	-40 ~ +85	
09	Weight	g	0.6±0.2	

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

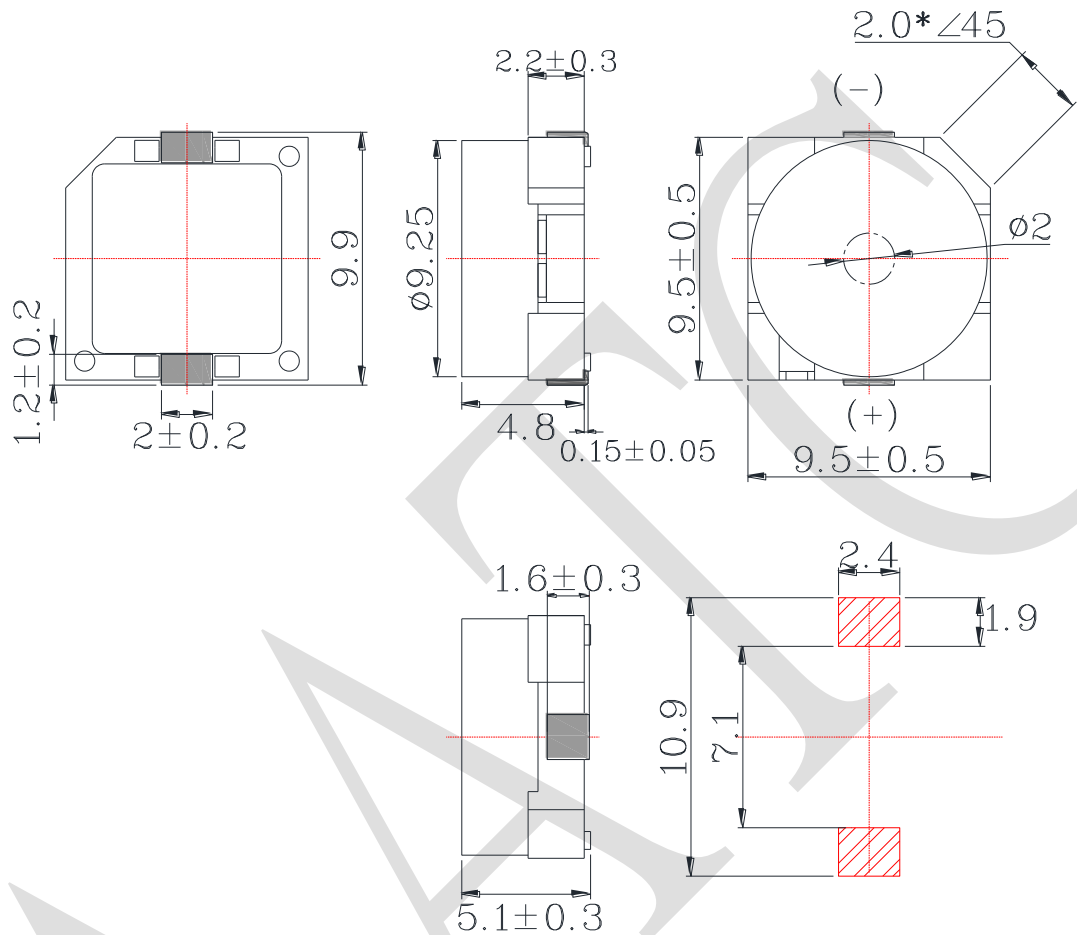

RoHS

TITLE: SOUND TRANSDUCER (SMD)		DRAWN: Hank	2020/05/08	SCALE: 1:1	SHEET: 1 : 1
PART NO. ADI-F10H5C		DESIGNED: R & D OF AAT	UNITS: mm		
DWG NO.		CHECKED:	TOLERANCE ± 0.5		
		APPROVAL:	FIRST ANGLE PROJECTION		
REV 1		MATERIAL: LCP			



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC