


1. SPECIFICATION

AC-901N-RPA-LF


ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	1.5	
02	Operating Voltage	V	1 ~ 3	
03	Consumption Current	mA Max.	80	Standard state, standard drive circuit. Square wave 1/2 duty.
04	Sound pressure level (Distance at 10cm)	dB(A) Min.	85	Rated voltage, rated frequency.
05	Direct Current Resistance	Ω	5.5±1	
06	Rated Frequency	Hz	2731	
07	Operating Temp.	°C	-30 ~ +70	
08	Storage Temp.	°C	-40 ~ +85	
09	Weight	g	1.0	

REV NO.

REVISION NOTE

APPROVAL

DATE

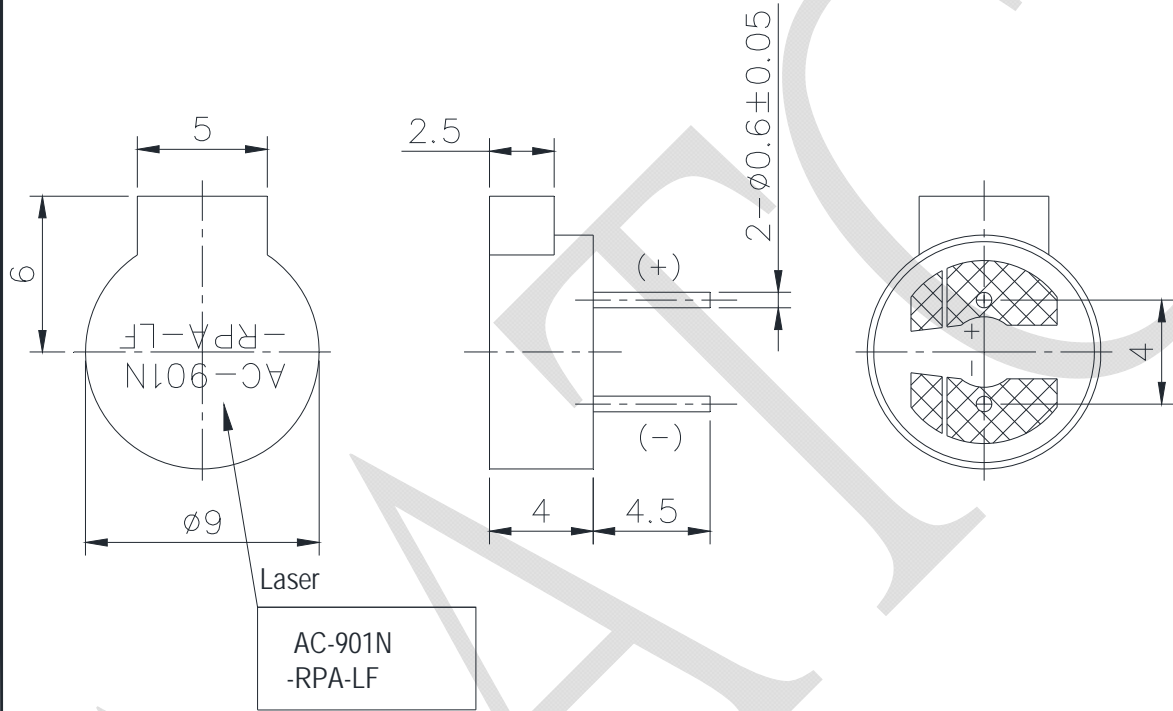

RoHS

TITLE: ELECTRO MAGNETIC BUZZER		DRAWN: <i>Blank</i> 2019/11/25	SCALE: 4:1	SHEET: 1 of 1
PART NO. AC-901N-RPA-LF		DESIGNED: R&D OF AAT	UNITS: mm	
DWG NO. UGCM0901DPD	4 REV	CHECKED:	TOLERANCE ± 0.5	
		APPROVAL:	UNLESS OTHERWISE SPECIFIED:	
		MATERIAL: NORYAL	ONE PLACE DECIMAL \pm ***	
			TWO PLACE DECIMAL \pm ***	
			THREE PLACE DECIMAL \pm ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC