

1. SPECIFICATION

AZ-4411E-C




Items		Units	Specifications	Conditions
01	Rated Voltage	Vp-p	10	Square Wave
02	Operating Voltage	Vp-p	3~30	
03	Rated Current	mA(Max)	11	10Vp-p / 1.1KHz
04	Sound Output At 10cm	dBA(Min)	85	At 10Vp-p / 1.1KHz
05	Resonant Frequency	Hz	1100±300	
06	Capacitance at 120Hz	pF	77000±30%	
07	Operating Temp.	°C	-20 ~ +60	
08	Storage Temp.	°C	-30 ~ +70	
09	Weight	g	10	

REV NO.

REVISION NOTE

APPROVAL

DATE

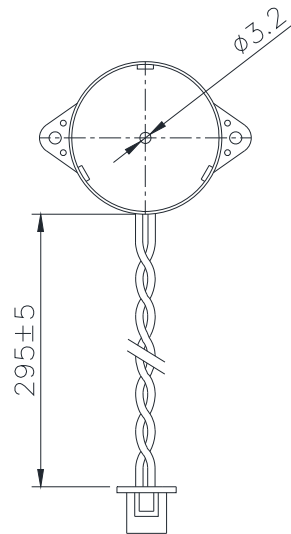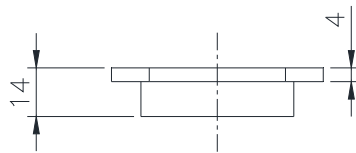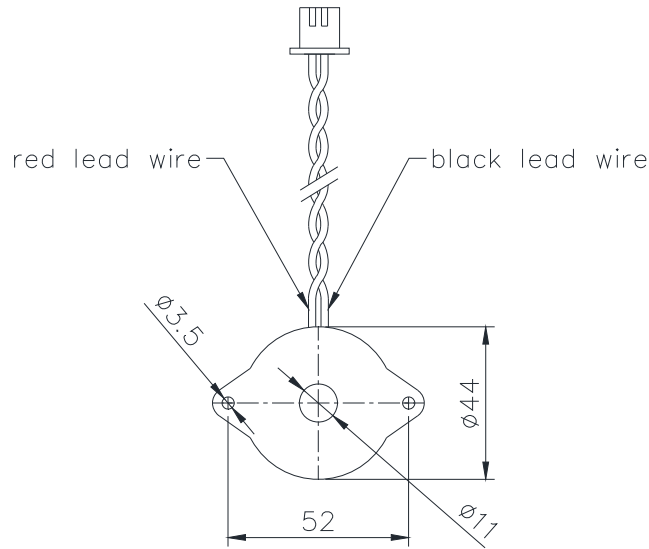

NOTES:

1. WIRE SPEC. UL1007 #26
 2. TERMINAL SPEC. A2501TOP-2 XH2.5
- HOUSING : A2501H02-2P XH2.5

TITLE: <i>PIEZO BUZZER</i>		DRAWN: <i>Milton</i> 09/25/2001	SCALE: 1:2	SHEET: 1 of 1
PART NO. <i>AZ-4411E-C</i>	1	DESIGNED: <i>R & D OF AAT</i>	UNITS: <i>mm</i>	TOLERANCE ± 0.5
DWG NO. <i>DTP-1068</i>		CHECKED:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL \pm *** TWO PLACE DECIMAL \pm *** THREE PLACE DECIMAL \pm ***	
	REV	APPROVAL:		
		MATERIAL: <i>ABS</i>		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.