1. SPECIFICATIONS

AS-1204A-RPC

	Items	Units	Specifications	Conditions
01	Rated Voltage	Vo-p	3.5	
02	Operating Voltage	Vo-p	2.0~5.0	
03	Comsumption Current	mA (Max)	Mean 70 Peak 210	Applying rated voltage, rated frequency Square wave,1/2 duty subject to standard state.
04	Direct Current Resistance	Ohm	16 ± 3	
05	Sound Output	dBA (min)	92	Distance at 10cm,applying rated voltage, rated frequency square wave, 1/2duty subject to standard state.
06	Rated Frequency	Hz	2731	
07	Operating Temp.	℃	-30 ~ +70	
08	Storage Temp.	℃	-40 ~ +85	
09	Weight	Gram	1.0	

REV NO.	REVISION NOTE	APPROVAL	DATE

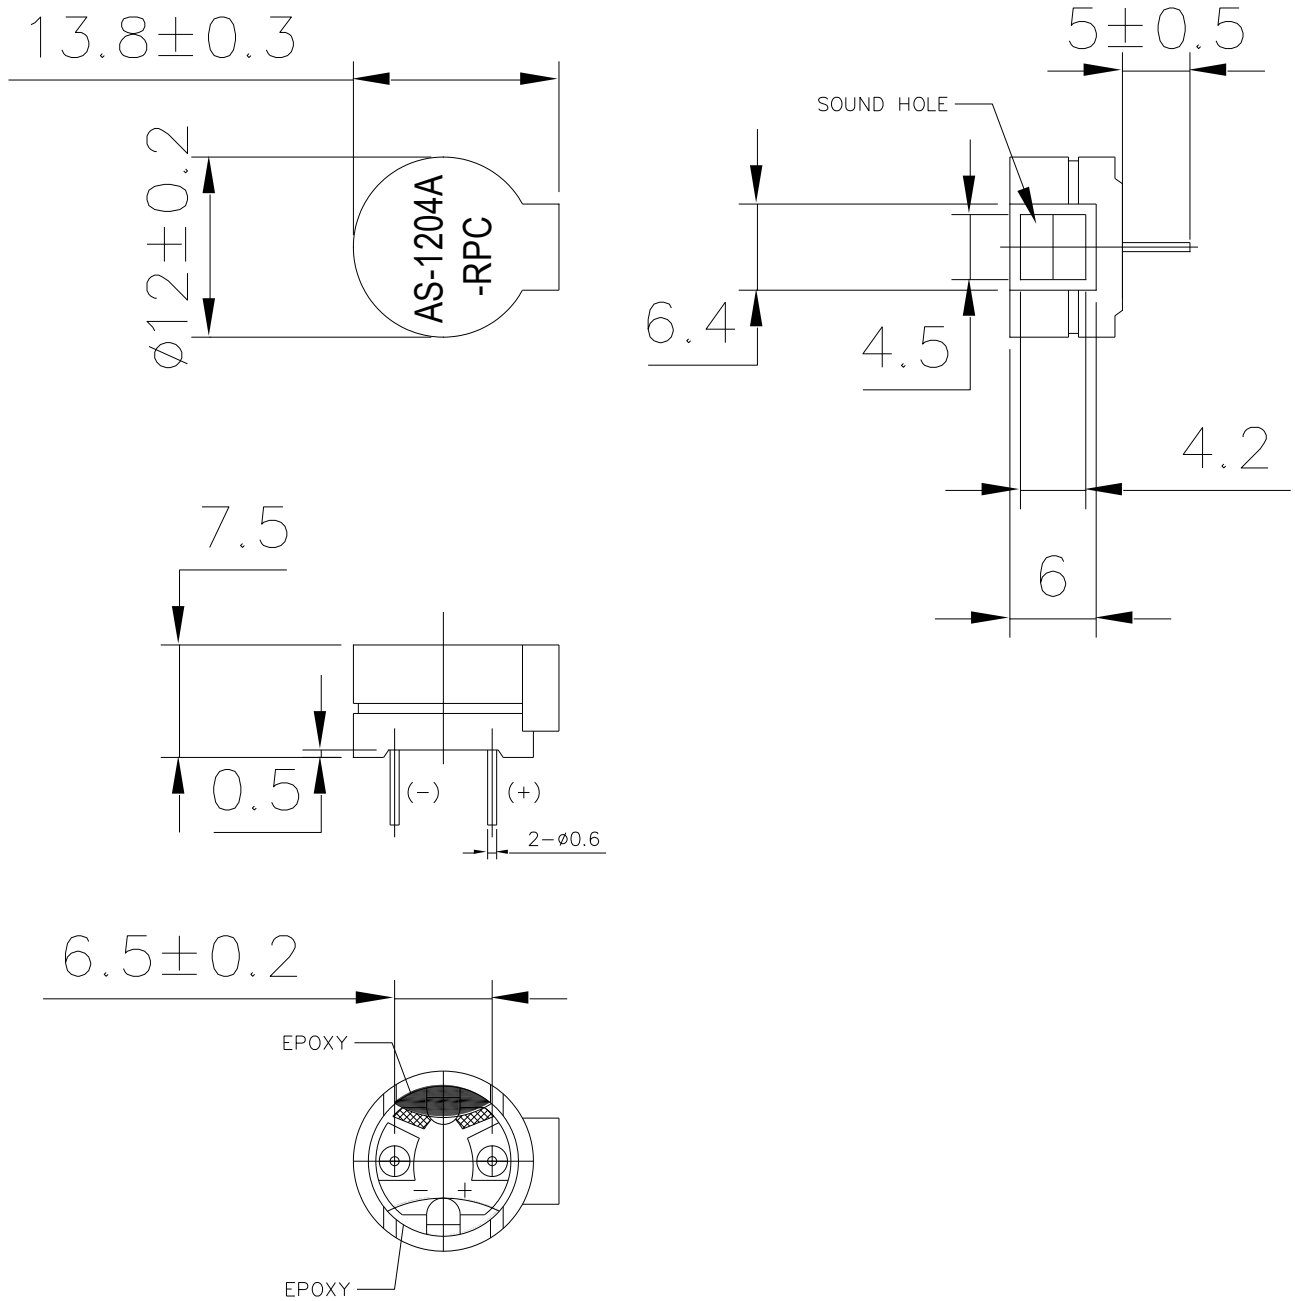

WASH NOT ALLOWED

RoHS

TITLE: SOUND TRANSDUCER DIMENSIONS	DRAWN: Jason 2009/12/11	SCALE: 3:1	SHEET: 1 OF 1
PART NO. AS-1204A-RPC	DESIGNED: R&D OF AAT	UNITS: mm	
	CHECKED:	TOLERANCE ± 0.5	
DWG NO. HS-091211	APPROVAL:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL ± *** TWO PLACE DECIMAL ± *** THREE PLACE DECIMAL ± ***	
1 REV	MATERIAL: NORYL		

芷翔科技股份有限公司
ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.