
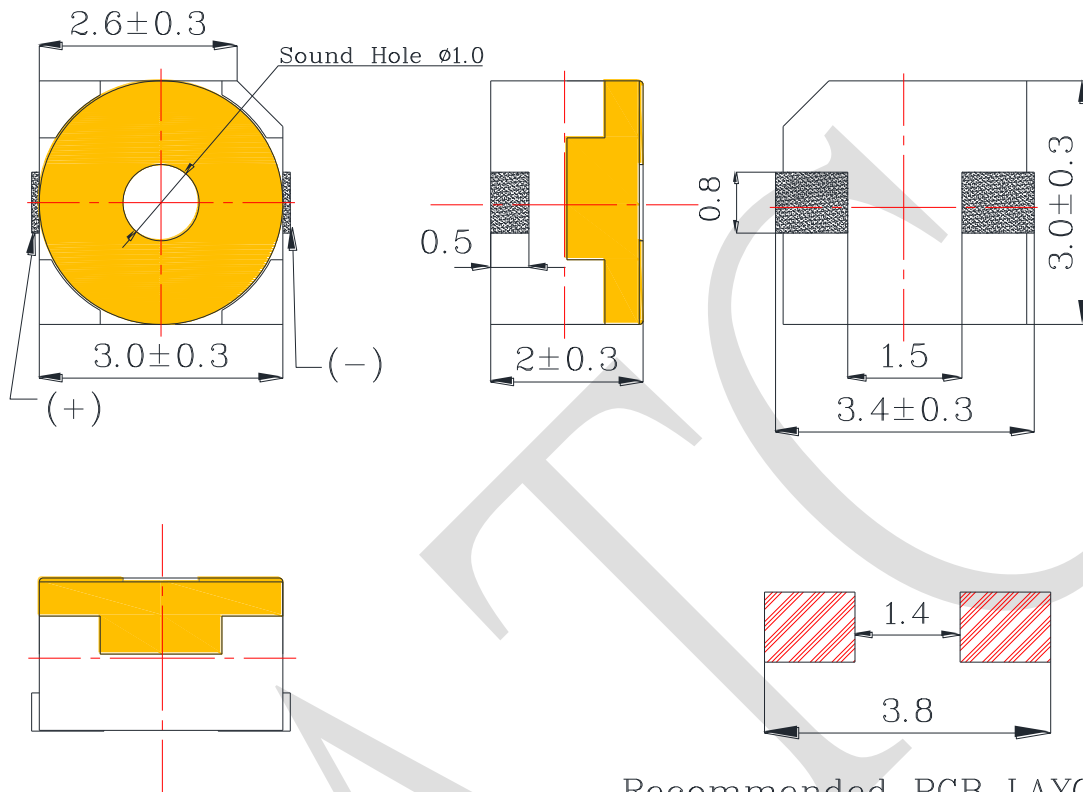


1. SPECIFICATION

AD-3A3G

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	3	
02	Operating Voltage	V	2 ~ 4	
03	Consumption Current	mA Max.	110	Standard state, standard drive circuit. Square wave 1/2 duty.
04	Sound pressure level (Distance at 5 cm)	dB(A) Min.	63	Rated voltage, rated frequency.
05	Direct Current Resistance	Ω	12 \pm 3	
06	Rated Frequency	Hz	4500	
07	Operating Temp.	$^{\circ}\text{C}$	-20 ~ +70	
08	Storage Temp.	$^{\circ}\text{C}$	-30 ~ +80	
09	Weight	g	LCP	

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------



Recommended PCB LAYOUT

RoHS

TITLE: SOUND TRANSDUCER (SMD)		DRAWN: Hank	2020/05/25	SCALE: 1:1	SHEET: 1 : 1
PART NO.	AD-3A3G	DESIGNED:	R & D OF AAT	UNITS:	mm
DWG NO.	SMD-030020F-03045	CHECKED:		TOLERANCE ± 0.3	
		APPROVAL:		FIRST ANGLE PROJECTION	
REV	1	MATERIAL:	LCP		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC