
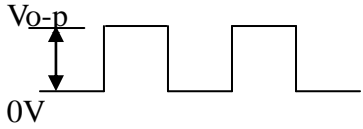


1. SPECIFICATION

AS-1201E-RPA

Items		Units	Specifications				Conditions
01	Rated Voltage	Vo-p	1.5				
02	Operating Voltage	Vo-p	1.0~2.0				
03	Mean Current	mA (Max)	70				Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
04	Direct Current Resistance	Ohm	6.5 ± 1.0				
05	Sound Output	dB (min)	80				Distance at 10cm, applying rated voltage, rated frequency square wave, 1/2 duty subject to standard state.
06	Rated Frequency	Hz	2048 ± 200				
07	Operating Temp.	°C	-40 ~ +85				
08	Storage Temp.	°C	-50 ~ +95				
09	Dimension	mm	Φ	12.0	Height	7.5	See attached drawing.
10	Weight	Gram	2.0				
11	Terminal		Two Pins				See attached drawing.

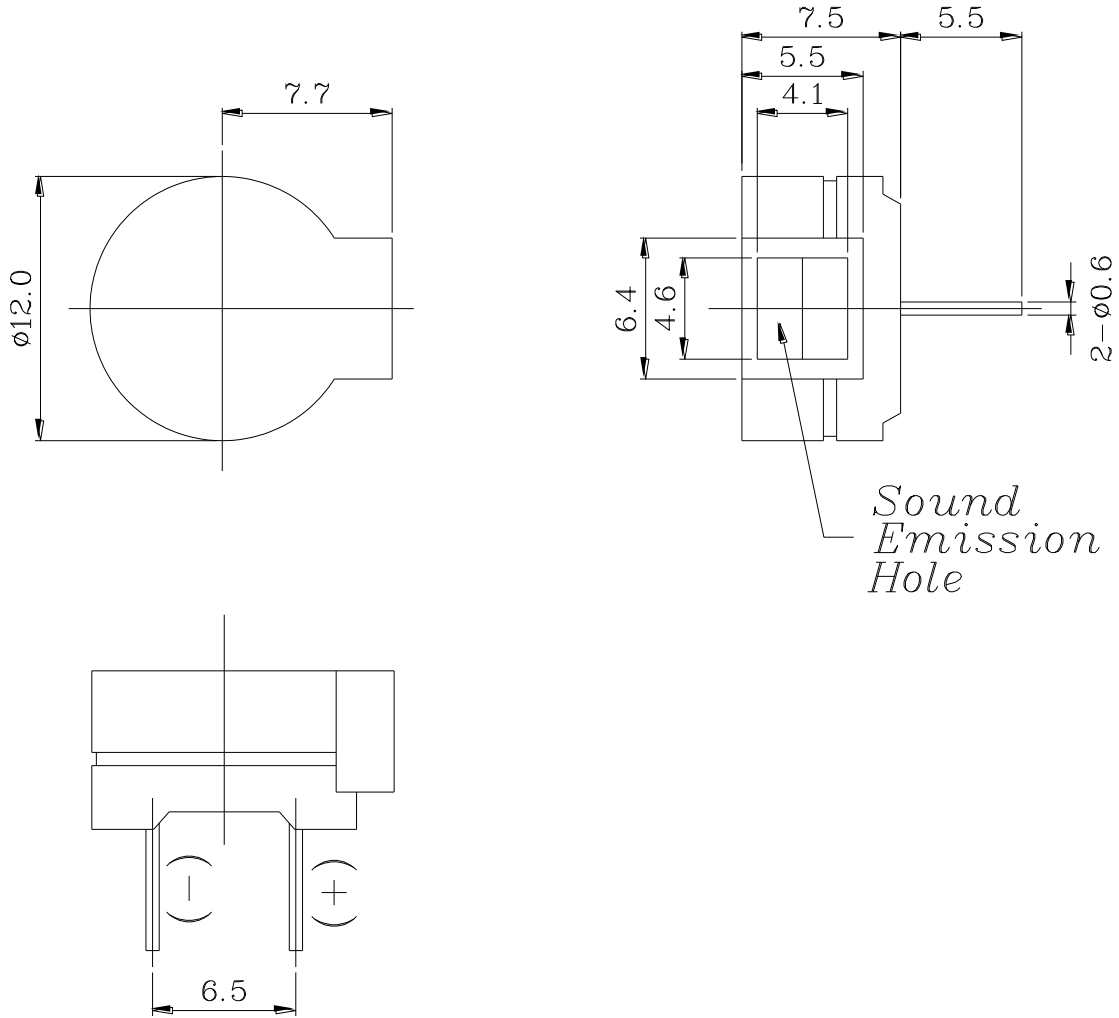

TITLE: SOUND TRANSDUCER DIMENSIONS

DRAWN: **Sea** 02/01/2000

SCALE: 3/1 SHEET: 1 OF 1

PART NO. AS-1201E-RPA

DESIGNED: R&D OF AAT

UNITS: mm

CHECKED:

TOLERANCE ± 0.5

APPROVAL:

UNLESS OTHERWISE SPECIFIED:

ONE PLACE DECIMAL ± ***

TWO PLACE DECIMAL ± ***

THREE PLACE DECIMAL ± ***

DWG NO. DTE-1020

REV 1

MATERIAL: PPO



苙翔科技股份有限公司
ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.