


1. SPECIFICATION

AC-1201A-LF





ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	1.5	
02	Operating Voltage	V	1~ 3	
03	Consumption Current	mA (Max)	Mean : 40	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
			Peak : 120	
04	Direct Current Resistance	Ω	16±2.4	
05	Sound pressure level (Distance at 10cm)	dBA (Min)	85	Applying rated voltage, rated frequency Square wave, 1/2 duty subject to standard state.
06	Rated Frequency	Hz	2800	
07	Operating Temp.	°C	-30 ~ +70	
08	Storage Temp.	°C	-40 ~ +85	
09	Weight	g	1.6	

REV NO.

REVISION NOTE

APPROVAL

DATE

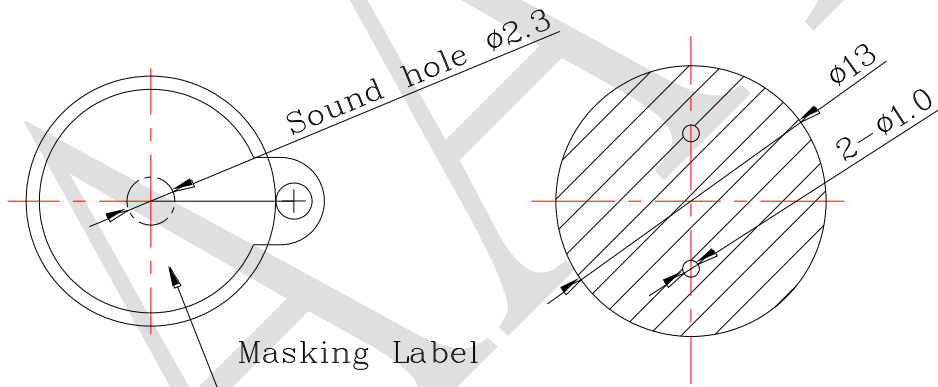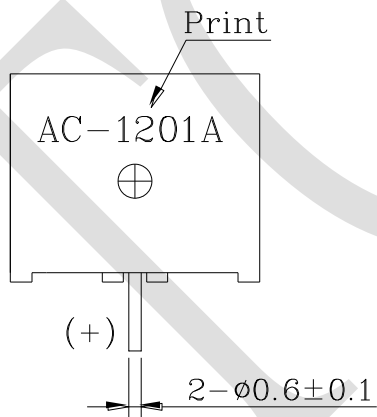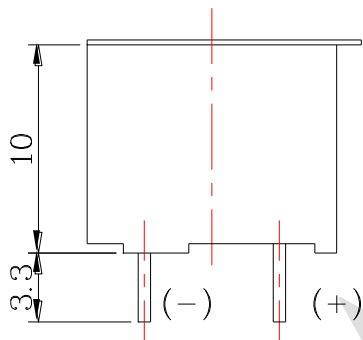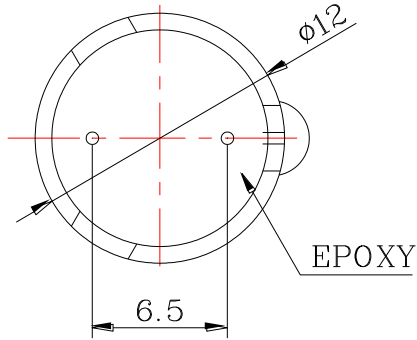

RECOMMENDED PCB LAYOUT

RoHS

TITLE: ELECTRO MAGNETIC BUZZER		DRAWN: Zack	2014/07/22	SCALE: 4:1	SHEET: 1 of 1
PART NO. AC-1201A-LF		DESIGNED: R&D OF AAT		UNITS: mm	
DWG NO. SHXG1201AA-F28		CHECKED:		TOLERANCE ± 0.5	
REV 1		APPROVAL:		UNLESS OTHERWISE SPECIFIED:	
		MATERIAL: PBT		ONE PLACE DECIMAL ± ***	
				TWO PLACE DECIMAL ± ***	
				THREE PLACE DECIMAL ± ***	



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC