
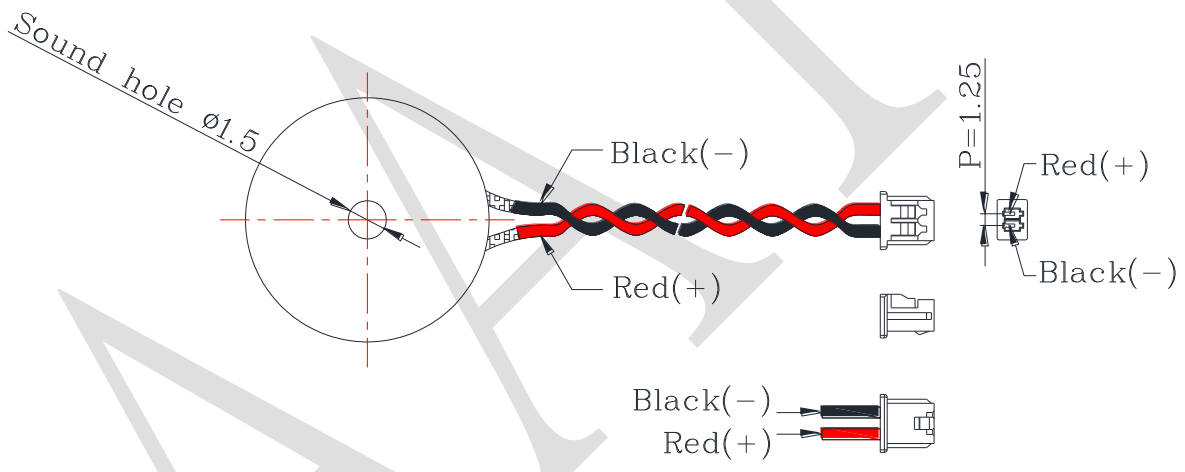
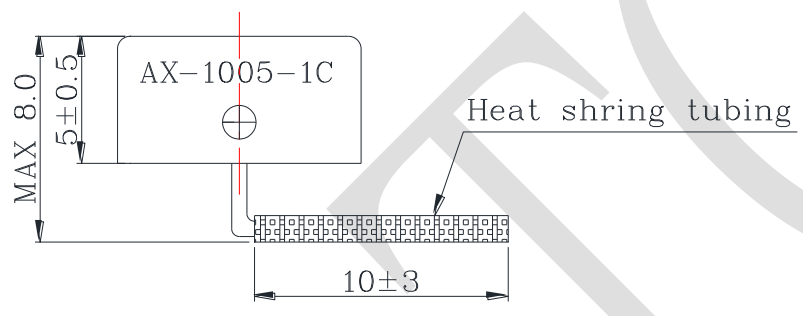


# 1. SPECIFICATION

AX-1005-1C

ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	5.0	
02	Operating Voltage	V	3.0 ~ 6.0	
03	Consumption Current	mA (Max)	35	Rated Voltage
04	Resonant Frequency	Hz	2700± 300	Rated Voltage
05	Response times	ms	≥ 100	
06	Sound pressure level	dB(A) Min.	80	Distance at 10cm Rated Voltage / Resonant Frequency
07	Operating Temp.	°C	-30 ~ +70	
08	Storage Temp.	°C	-40 ~ +85	
09	Weight	g	1.1±0.3	

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

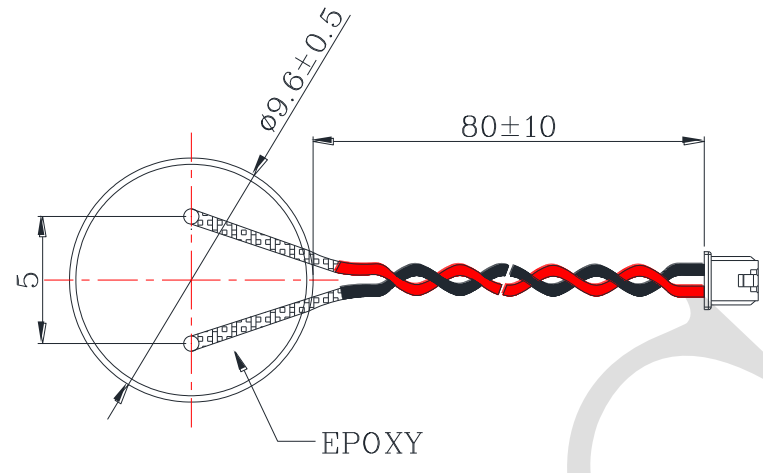

Wire: UL 1571.AWG30#  
Connector: Equivalent to Molex 51021-0200

RoHS

TITLE: ELECTRO MAGNETIC BUZZER		DRAWN: <b>Moose</b> 2018-06-13	SCALE: 4:1	SHEET: 1 of 1
PART NO. AX-1005-1C		DESIGNED: R&D OF AAT	UNITS: mm	
DWG NO. UGCM0905XPWC80-Z		CHECKED:	TOLERANCE ± 0.5	
		APPROVAL:	UNLESS OTHERWISE SPECIFIED: ONE PLACE DECIMAL ± *** TWO PLACE DECIMAL ± *** THREE PLACE DECIMAL ± ***	
REV	1	MATERIAL: PBT		



**ADVANCED ACOUSTIC TECHNOLOGY CORPORATION**

For more information, please contact AATC.

AATC