
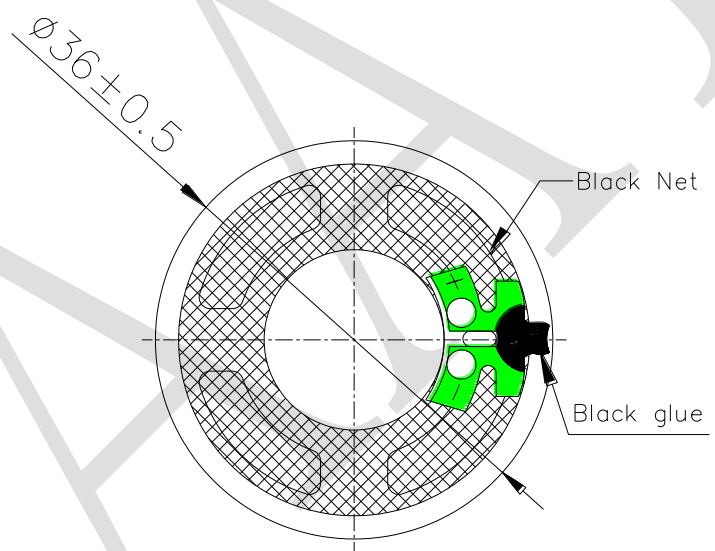
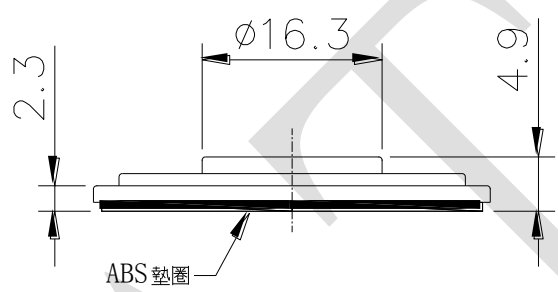


1. SPECIFICATION

AK-3608BB-34

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 36 mm	
03	Rated Input Power	0.5 W	
04	Max. Input Power	0.8 W for 1 minute	
05	Impedance	$8\Omega \pm 15\%$ at 1.5KHz 1V	
06	Resonance Frequency (Fo)	550 Hz \pm 20% at Fo, 1V	
07	Sensitivity (S.P.L.)	92 dB(0.1W/0.1M) \pm 3 dB	at AVE 0.6, 0.8, 1.0, 1.2 KHz.
		98 dB(0.5W/0.1M) \pm 3 dB	
08	Frequency Range	Fo – 5 K Hz	
09	Total Harmonics Distortion	Max 10 % at 1 KHz, 1.5V.	

REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

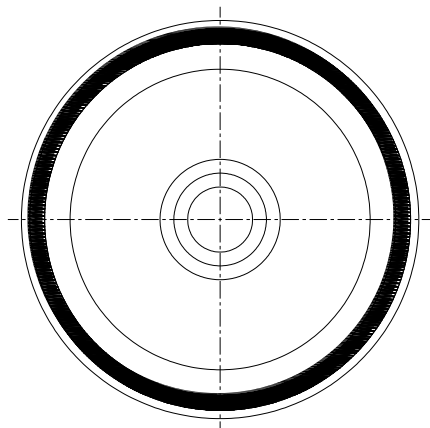

RoHS

TITLE: DYNAMIC SPEAKER		DRAWN: Zack	2014/11/13	SCALE: 2:1	SHEET: 1:1
PART NO. AK-3608BB-34	2	DESIGNED: R&D OF AAT	UNITS: mm		
DWG NO. UGS3608-07		CHECKED:	TOLERANCE ± 0.5		
	REV	APPROVAL:	UNLESS OTHERWISE SPECIFIED:		
		MATERIAL: ALLOY+PET	ONE PLACE DECIMAL ± ***		
			TWO PLACE DECIMAL ± ***		
			THREE PLACE DECIMAL ± ***		



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC